


WHERE $T \geq 10"$, INSTALL TWO SETS OF MODULAR CASING SEALS BETWEEN NEW PIPE AND WALL SLEEVE, AS SHOWN.
 WHERE $T < 10"$, INSTALL ONE MODULAR CASING SEAL, AT THE CENTER OF THE WALL

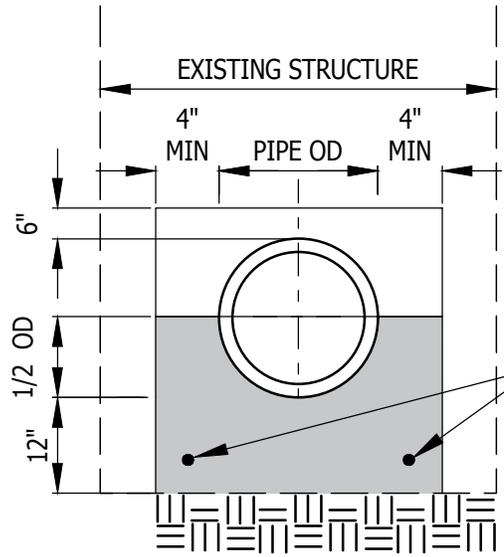

CONCRETE - 4000 psi @ 28 days
 THICKNESS OF CRADLE $\frac{1}{2}$ PIPE DIAMETER + 12"
 BEAR ON UNDISTURBED SUBGRADE.

#4 BARS *
 *REINFORCEMENT SHALL BE TWO #4 BARS FOR PIPE DIAMETER LESS THAN OR EQUAL TO 8 INCHES, FOUR #4 BARS FOR PIPE DIAMETER GREATER THAN 8 INCHES.

SECTION A-A

NOTE: TO BE USED WHEN CONNECTING TO DISTRICT INTERCEPTOR (SEE PAGE 38).

